

## PIED




Support antivibratoire machine agroalimentaire



Références	C mm	B - C Mini	Maxi	d	Réglage mm	Charge daN
LMPU 080 M12	80	48	60	M 12	12	100 - 750
LMPU 110 M16	110	48	60	M 16	12	280 - 1500
LMPU 160 M20	165	48	60	M 20	12	1600 - 3800
LMPU 220 M24	220	68	80	M24	12	2600 - -6000


Support de nivellement en acier usiné finition poli avec ancrage

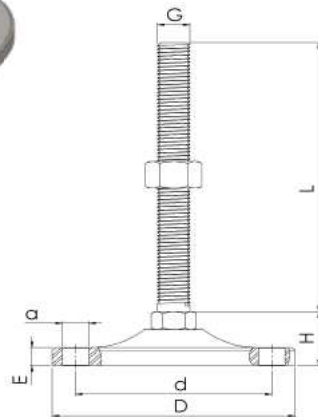

Références Version acier	D	H	d	E	G x L	Charge max. Kg
NT 120 M16x90	120	30	90	3	M16x100	1500
NT 120 M20x150	120	32	90	3	M20x150	2000



Support antivibratoire



Références	Dimensions				Charge mini	Flèche mini	Charge Max	Flèche Max
	D	H	l1	G	kg	mm	kg	mm
PCA 40 M8	50	20	45	M8	12	1	60	3
PCA 60 M10	58	22	80	M10	30		150	